

Portable 20 kW DC charging station




JUICE DIRECTOR 2

JUICE DIRECTOR 2 is a 20 kW fast charging station offering all the flexibility you need.

By positioning the inverter outside the vehicle, you can charge your vehicle with DC power whenever and wherever, saving time in the process.


JUICE DIRECTOR 2

Maximum power to go



CCS2 charger plug
Unbreakable, high-quality craftsmanship.

Ergonomic design
The handle is fitted at an ergonomically designed height to prevent back pain.

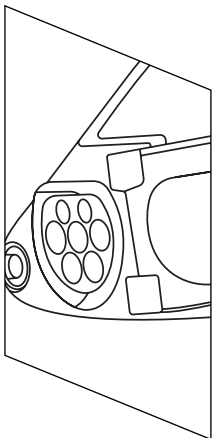


More is more
Can also be equipped with a 22 kW AC socket on request. Guaranteed flexibility.



Works anywhere

With an IP54 protection rating, JUICE DIRECTOR 2 is suitable for use outdoors, making it a reliable all-rounder. Use it in your own garage at home, your company showroom or workshop, or as a fast charging station for employees on the go. JUICE DIRECTOR 2 offers an infinite range of possibilities.



Professional wheels
Shock-absorbing wheels protect the technology used in JUICE DIRECTOR 2, and ensure a particularly long service life.

Charge even faster
Ideal for vehicles with a small on-board power inverter and for vehicles with just single- or two-phase AC charging.


No installation costs

Simply connect to the mains, plug into your vehicle, and get charging with DC power right away: JUICE DIRECTOR 2 is ready to go in just a few easy steps.




Emergency switch
Your safety is our priority.


CHAdEMO
You can add a CHAdEMO adapter to the JUICE DIRECTOR 2 as an optional extra.

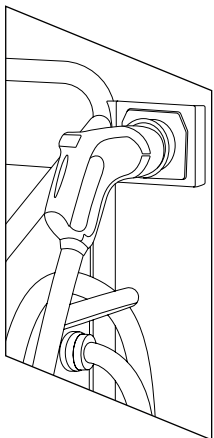

Optional RFID
RFID activation can be included on request. Protect your JUICE DIRECTOR 2 against undesirable „charging parasites“, and differentiate between employee usage rights.

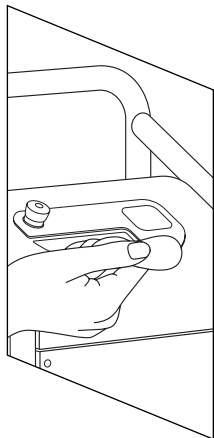

Protection guaranteed
by the JUICE DIRECTOR 2's highly robust housing protection, making it absolutely fit for purpose.



Risk-free charging

High power levels are often associated with higher risks. Not with JUICE.

The RCD device, overcurrent protection and earth fault monitoring in the optional Type 2 AC socket guarantee risk-free charging.

Short-circuit protection, overcurrent protection, over- and undervoltage protection, and earth fault monitoring at the DC output terminals protect you against any conceivable hazard or problem. There is no safer way to charge with DC power when you're on the move.

Technical specifications

Dimensions	Height: 1060 mm, Depth: 370 mm, Width: 770 mm
Weight	70 kg
Input current	3 x 400 V AC (± 10 %) / 45 – 65 Hz / 32 A
Mains connection	CEE 32
Output power DC	20 kW, 170 – 940 V DC, max. 50 A
Output power AC	22 kW, 400 V AC, 32 A
Protection class – conformity	IP54 – EN 61851-23 / DIN 70121: ISO 15118 Combo 2, CHAdEMO 0.9.1

Operating temperature	-20 °C to +45 °C
Management	OCPP 1.5 / 1.6, RFID activation
Communication	Ethernet, GSM / GPRS / UMTS or power line
Adapters	CCS2 cable (IEC 62196-3), also with CHAdEMO adapter on request (JEVS G105) and/or Type-2 socket (IEC 62196)
Material – colour	Rugged white 100 % metal housing – anthracite housing protection, black cable

Subject to change without prior notice.

JUICE DIRECTOR 2

Miniature powerhouse
on wheels





Successfully tested on a continuous basis
We guarantee compatibility with all existing and new electric cars on the market fitted with a CCS2 connector.



Rugged
Rugged housing with specially designed housing protection for uncompromising use in all elements.



No need for expensive installation
Just put in position, plug in and charge with 100 % portable DC power – no need for complex installation.



Find more information and accessories here:
juice-technology.com/juice-director